技术要求:
1.材质:双铜128G
2.规格:单页尺寸80x103mm
展开尺寸720x103mm
3.性能要求:风琴折,9P8折,双面印刷
文字色号:PANTONE 431C

80.00 mm

103.00 mm

正面

无线充+蓝牙音响+小夜灯+时钟

无线充 小夜灯 蓝牙音响 时钟闹铃 跑马灯 收音机

产品使用说明

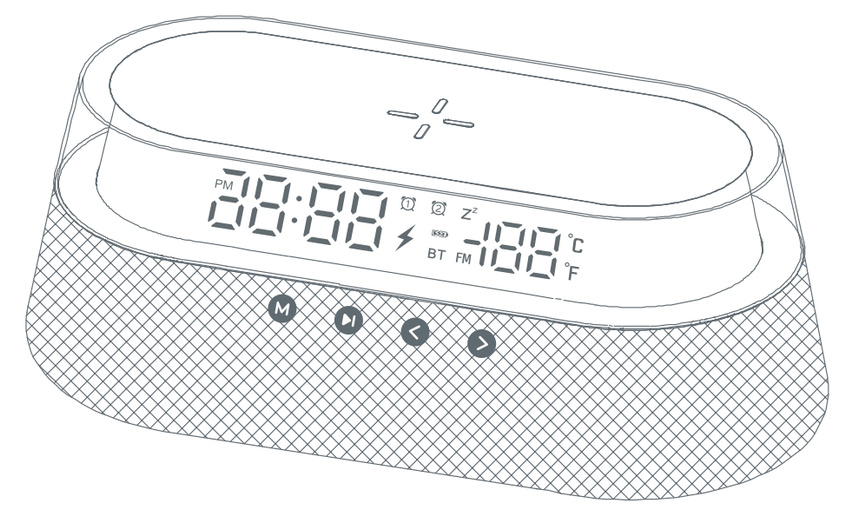

非常感谢您选择我司产品,在使用产品前请认真阅读好产品说明

产品特点

- 造型简易精致.
- 小夜灯.
- 时钟闹铃.
- 无线快充.
- 蓝牙音箱.
- 充电距离≤6mm.

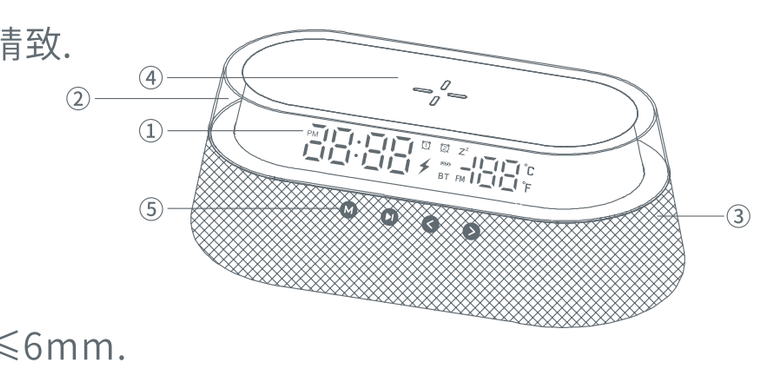

外观按键

① 时钟显示区域
② 灯罩
③ 灯光调节触摸开关
④ 无线充电设备感应区
⑤ 时钟功能按键
⑥ Type-C输入接口
⑦ 硅胶防滑垫
⑧ 音频外接端口



时钟按键功能

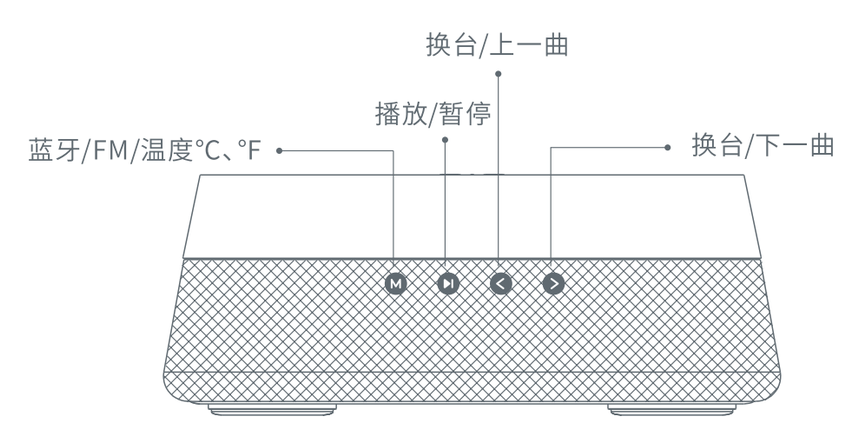

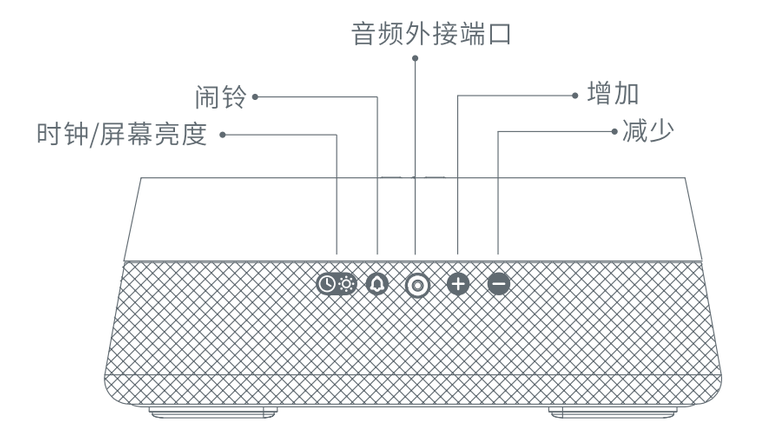

无线充使用

1. 给产品充电时将USB数据线的USB端口接入电源适配器,Type-C端口接入无线充电器,时钟显示区域有"⚡"指示灯呼吸闪烁,充满后"⚡"指示灯常亮。

2.给手机充电时将产品接通电源,手机放在本产品充电指示区域,时钟显示区域上方充电指示灯"⚡"常亮,进入充电状态.充满后"⚡"消失。

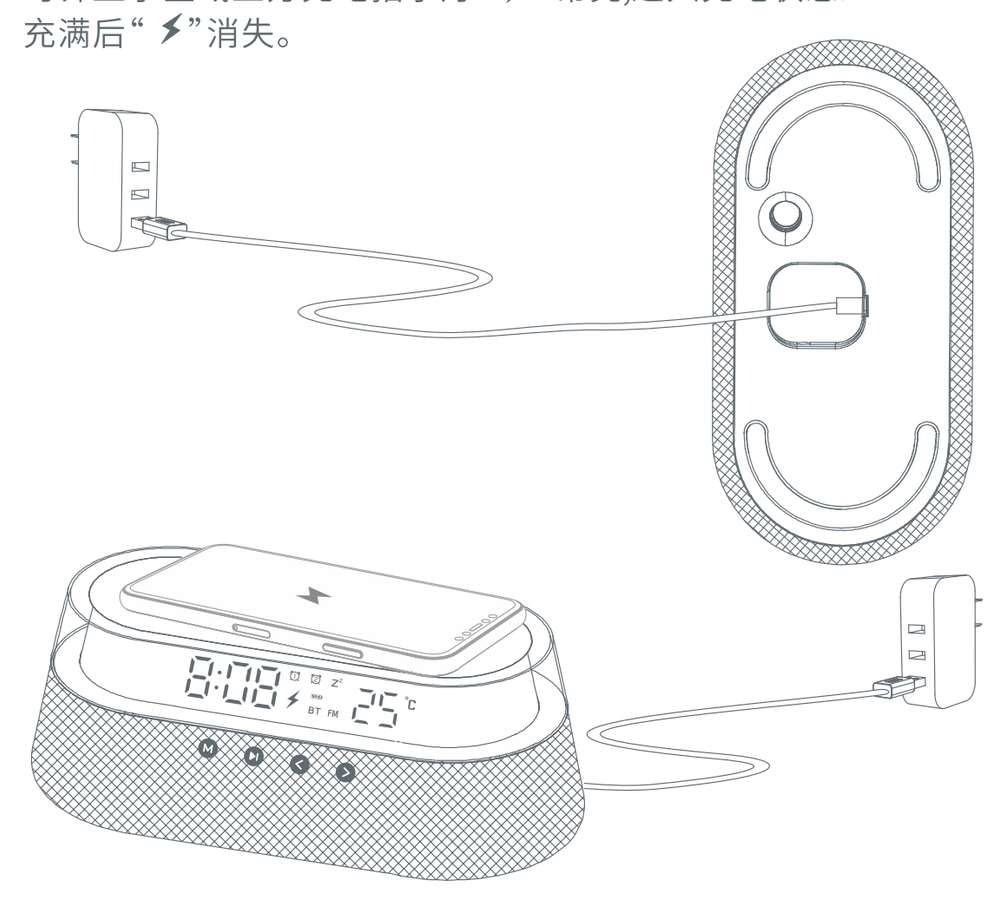

蓝牙音响操作方式

在时钟显示模式下,短按 Ⓜ 打开蓝牙,并有提示音,时钟显示区域会显示[BT]指示灯闪烁,表示音响在搜索配对状态,此时打开您手机的蓝牙功能,在蓝牙设备中,搜索蓝牙音响出现:"S39"字样,点击选中"S39"设备名称。自动进入配对,配对连接成功后,会有提示音指示,且[BT]常亮。连接蓝牙成功后,可以同步手机时间。备注:打开蓝牙后待配对状态下,无任何操作,15分钟后自动关闭蓝牙。

音箱播放状态时

1.短按 ⏯ 播放/暂停.
2.短按 ⊕ 增加音量;短按 ⊖ 减少音量;
3.短按 < 切换上一曲.短按 > 切换下一曲;
4.短按 Ⓜ 退出蓝牙模式,并打开FM,再次短按 Ⓜ 关闭FM。

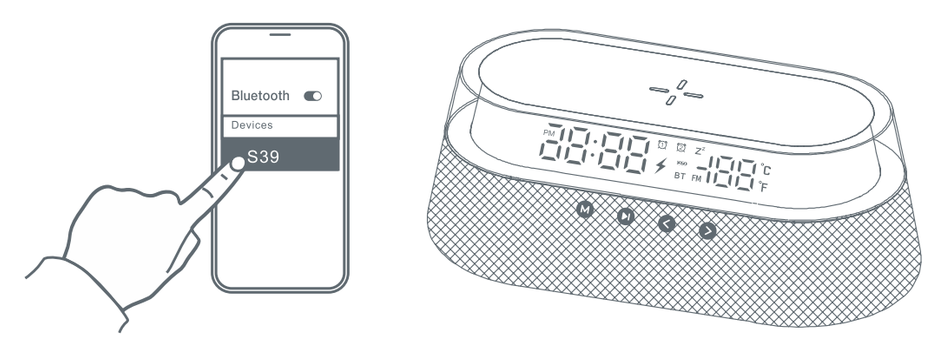

FM操作方式

在时钟显示模式下,短按两次 Ⓜ 打开FM,时钟显示区域会显示FM常亮。

Fm播放状态时

- 长按 ⏯ 自动搜台,成完后自动播放。
- 短按 ⏯ 播放/暂停.
- 短按 ⊕ 增加音量;短按 ⊖ 减少音量;
- 短按 < 向上换台.短按 > 向下换台;
- 短按 Ⓜ 关闭FM。

时钟设置

- 长按 🕓☼ 切换12/24小时制.短按 ⊕/⊖ 切换12/24小时。
- 再次短按 🕓☼ 进入时钟设置状态,小时开始闪烁,短按 ⊕/⊖ 调节小时,
- 再次短按 🕓☼ 调节分钟,短按 ⊕/⊖ 调节分钟,再次短按 🕓☼ 保存当前设置。

温度(°C/°F)切换

- 长按 Ⓜ 切换°C/°F

闹铃设置

1.短按 ⏰ 打开闹铃1/闹铃2/关闭闹铃1/闹铃2依次循环.
2.长按 ⏰ 闹铃图标,进入闹铃1/闹铃2设置,时钟或分钟闪烁,短按 ⊕/⊖调节小时/分钟。

调节闹铃音量大小

- 闹铃响时,短按⊕/⊖ 调节闹铃音量大小.
- 当闹铃响时,轻拍侧面触摸开关,可贪睡 5 min,共享受4次贪睡;长触摸侧面,停止当前闹钟.



小夜灯功能

- 长触摸侧面开/关夜灯
- 短触摸侧面依次循环为低亮-高亮-跑马灯

蓝牙模式下:

- 长触摸侧面开/关夜灯
- 短触摸侧面依次循环为低亮-高亮-跑马灯-灯光律动

调节屏幕亮度

- 短按 🕓☼ 调节屏幕亮度,高亮—中亮—低亮—关闭依次循环。

音频外接端口

- 将音频连接线插入外接设备及产品,有提示音,可以通过产品直接播放音乐。
- 再次短按 Ⓜ 关闭外接音频模式。

备注:音频连接线连接的状态下,短按 Ⓜ 切换BT-FM-打开外接音频模式-关闭外接音频模式依次循环。



适用设备

本产品支持快速无线充电功能,符合QI无线充电标准;通过磁感应方式实现短距离无线电能传输,**本设备支持所有符合QI标准的无线充设备**.使用5V输出的适配器时,无线充电支持5W负载.使用符合QC2.0及以上标准的适配器时,无线充电支持10W负载;设有过充保护及过流保护.

注意事项

- 请勿长时间在阳光直射或高温的地方使用、存放该产品.
- 请勿在离磁卡、磁记录媒体和精密的仪器太近的地方充电.
- 请勿分解或者改造本产品.
- 请勿用湿手触碰交流适配器.
- 请将本产品远离水或其它液体.
- 如果您想清洁本产品,请断开电源.
- 产品工作环境温度范围:-20—45°C.

规格参数

产品材料:进口ABS+五金
电源输入:DC5V/3A 9V/3A
充电效率:75%
功率:5W/7.5W/10W/15W
扬声器功率:4Ω5Wx2
电池容量:1800mAh
产品重量:698G
产品尺寸:235×115×92mm
电源充电口为国际通用Type-C端口

80.00 mm

103.00 mm

反面

WIRELESS CHARGER+

SPEAKER +NIGHT LIGHT+CLOCK

WIRELESS CHARGING LAMP WIRELESS SPEAKER ALARM CLOCK MARQUEE HORSE RACE LAMP RADIO

PRODUCT INSTRUCTIONS

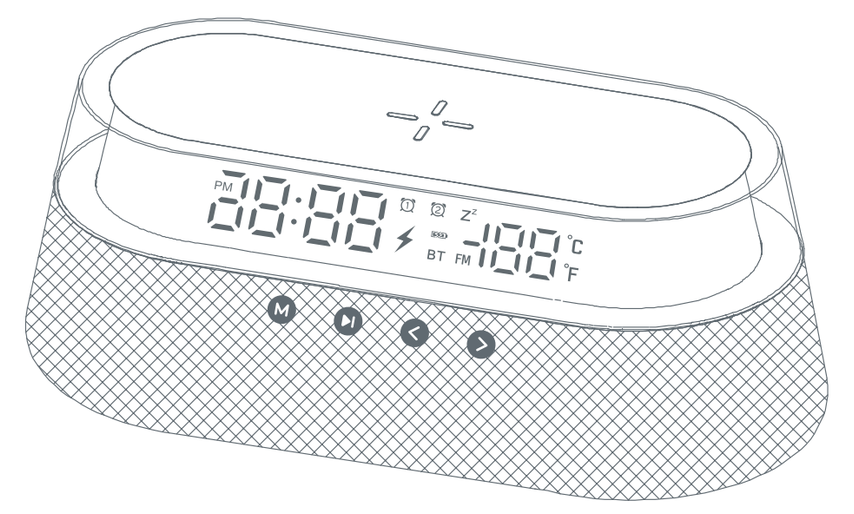

Thank you so much for choosing our product,
please read the manual carefully before using the product.

FEATURES

- Simple and exquisite shape.
- Night light.
- Clock alarm.
- Wireless fast charge.
- Wireless Speaker
- Charging distance≤6mm.

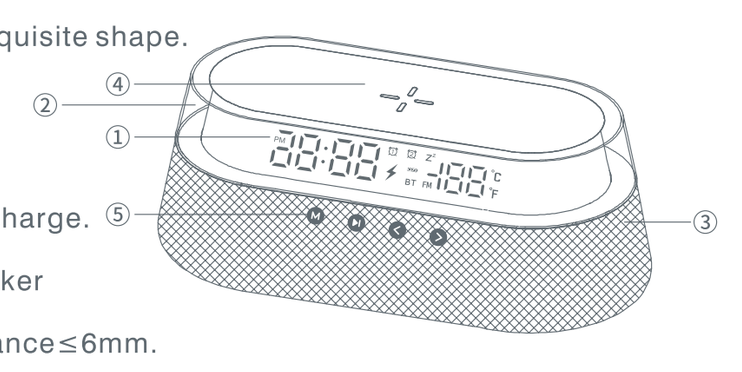

APPEARANCE BUTTONS

① Clock display area
② Chimney
③ Light adjustment touch switch
④ Wireless charging device induction area
⑤ Clock function button
⑥ Type-C input interface
⑦ Silicone anti-slip pad
⑧ Audio external port



CLOCK BUTTON FUNCTION

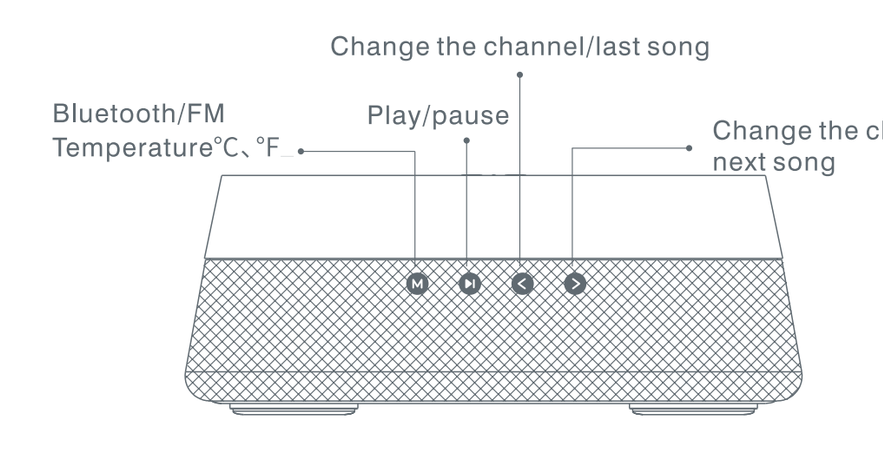

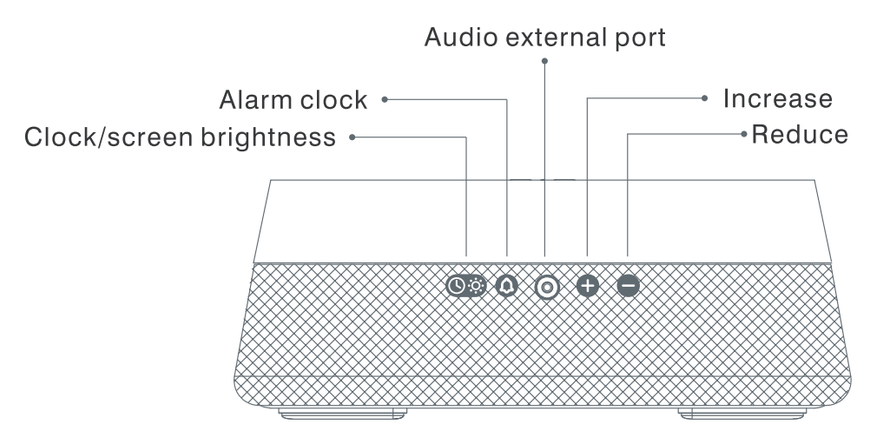

WIRELESS CHARGE INSTRUCTION

1. When charging the product, connect the USB port of the USB data cable to the power adapter,The Type-C port is connected to the wireless charger, and there is a "⚡" indicator light in the clock display area.The suction flashes, and the "⚡" indicator light is always on after it is fully charged.
2. When charging the mobile phone, connect the product to the power supply, and place the mobile phone in the charging in dication area of the product.The charging indicator "⚡" above the clock display area is always on, and it is in the charging state"⚡" disappears after fully charged.

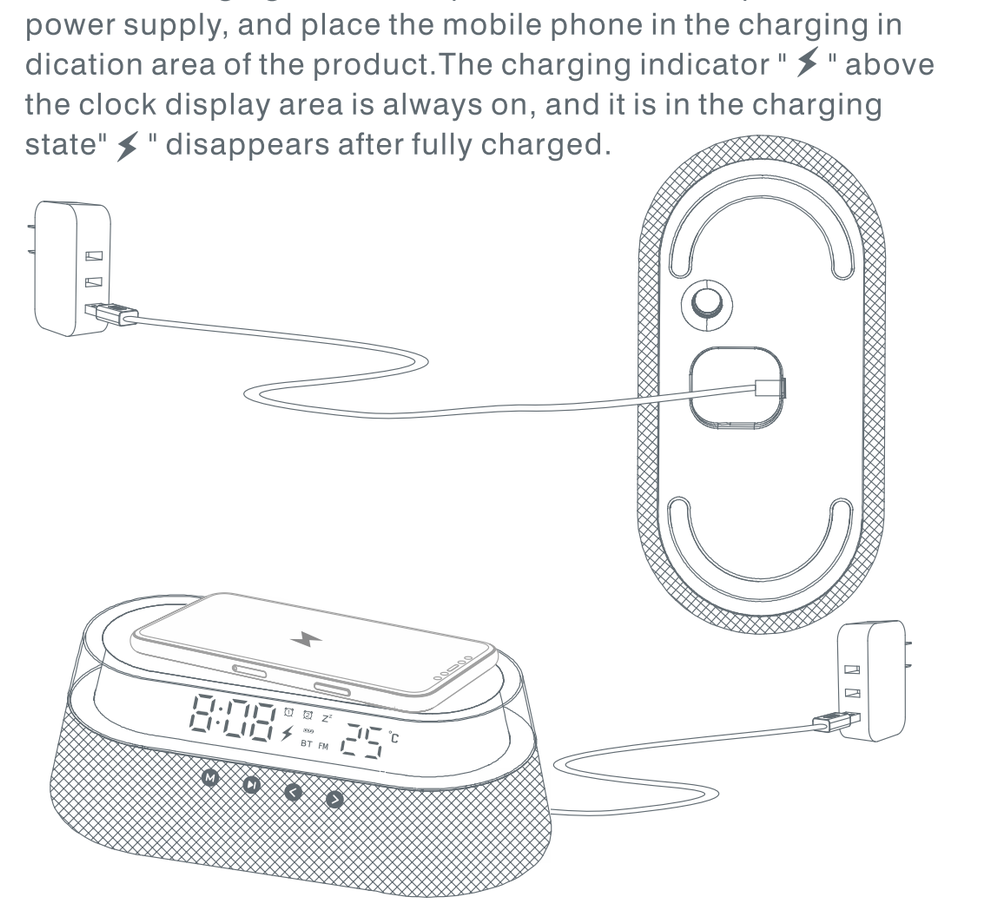

WIRELESS SPEAKER INSTRUCTIONS

In clock display mode, press Ⓜ to turn on Bluetooth, and a prompt tone will appear The "BT" will be displayed in the clock display area, indicating that the speaker is searching for pairing status. At this time, turn on the Bluetooth function of your mobile phone. In the Bluetooth device, the word "S39" will appear when you search for the Bluetooth audio.Click and select the device name S39.Automatically enter the pairing. After the pairing connection is successful, there will be a prompt tone,BT steady on. After connecting Bluetooth successfully, you can synchronize the phone time.
Remarks: After turning on Bluetooth, it will automatically turn off after 15 minutes without any operation in the state of pairing Bluetooth.

When the stereo is playing

1.Short pess ⏯ to play/pause.
2.Short pess ⊕ to increase the volume.
Short pess ⊖ to reduce the volume
3.Short pess < to switch to the previous song.
Short pess > to switch to the next song.
4.Short pess Ⓜ to exit Bluetooth mode and turn on FM.
Short pess Ⓜ again to turn off FM.

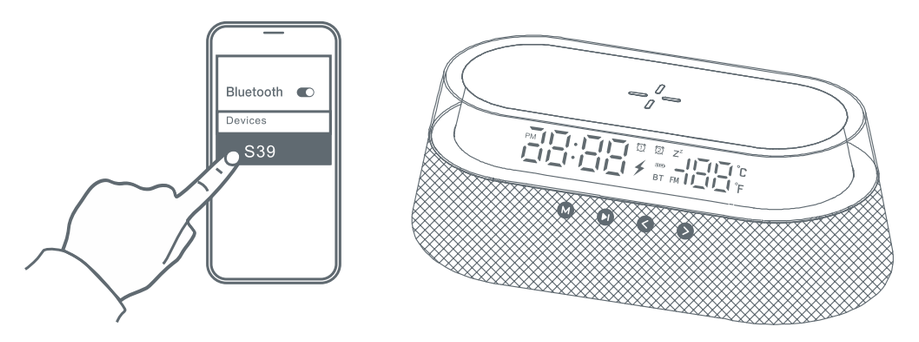

FM OPERATION MODE

In clock display mode, press Ⓜ twice to turn on FM, and the clock display area will display FM steady on.

When the FM is playing

- Long press ⏯ auto search for radio stations. It will play automatically when finished.
- Tap ⏯ Play/Pause.
- Short press ⊕ to increase the volume. Short press ⊖ reduce the volume;
- Short press < to change the channel up. Short press > down to change the channel;
- Short press Ⓜ to turn off FM.

CLOCK SETTING

- Long press 🕓☼ to switch to 12/24 hour system. Short press ⊕/⊖ to switch 12/24 hours.
- Short press 🕓☼ again to enter the clock setting state, and the hour starts to blink. Short press ⊕/⊖ to adjust the hour.
- Short press 🕓☼ again to adjust the minutes, press ⊕/⊖ to adjust the minutes, and press 🕓☼ again to save the current Settings.

THE TEMPERATURE (° C / ° F) IS SWITCHED

- Long press Ⓜ to switch ° C / ° F

ALARM SETTING

1.Short press ⏰ to turn on alarm 1/Alarm 2/ off alarm 1/ alarm 2.
2.Long press the ⏰ alarm icon to enter the alarm 1/ alarm 2 setting. The clock or minute flashes.
Short press ⊕/⊖ to adjust the hour/minute.

Adjust the alarm volume

- When the alarm goes off, press ⊕/⊖ to adjust the alarm tone;
- When the alarm goes off, tap the side to touch the switch, you can snooze for 5 minutes, and enjoy snooze for 4 times in total; Long touch the side to stop the current alarm.



NIGHT LIGHT FUNCTION

- Long touch side to turn on/off night light
- Short touch side to turn on circulation mode successively: low light- high light -RGB colors cycle light

Bluetooth mode:

- Long touch side to turn on/off night light
- Short touch side to turn on circulation mode successively: low light- high light -RGB colors cycle light-The lights change with the rhythm of the music

ADJUST SCREEN BRIGHTNESS

- Short press 🕓☼ to adjust the brightness of the screen, and the sequence of high-light→medium-light →low-light → off is repeated.

AUDIO EXTERNAL PORT

- Plug the audio cable into the external device or product. There will be a beep. You can use the product to Play music directly.
- Short press Ⓜ again to turn off external audio mode.

Note: When the audio cable is connected, short press Ⓜ to switch BT-FM- Turn on external audio mode - turn off external audio mode in sequence.



APPLICABLE DEVICE

This product supports fast wireless charging, which complies with the QI wireless charging standard; it realizes short-distance wireless power transmission through magnetic induction. This device supports all wireless charging devices that meet the QI standard. When using a 5V output adapter , Wireless charging supports 5W load. When using an adapter that meets QC2.0 and above standards,the wireless charging supports 10W load; Support overcharge protection (9V) and overcurrent protection (2A).

ATTENTION POINTS

- Do not use or store the product in direct sunlight or high temperature places for a long time.
- Do not charge in places too close to magnetic cards, magnetic recording media, and precision instruments.
- Do not disassemble or modify this product.
- Do not touch the AC adapter with wet hands.
- Keep this product away from water or other liquids.
- If you want to clean the product, please disconnect the power.
- Product working environment temperature range: -20~45℃.

SPECIFICATIONS

Product Material: imported ABS+hardware
Power Input: DC5V/3A 9V/3A
Charging Efficiency: 75%
Power: 5W/7.5W/10W/15W
Speaker Power: 4Ω5Wx2
Battery Capacity: 1800mAh
Product Weight: 698G
Product Size: 235×115×92mm
The power charging port is an international universal Type-C port

CE RoHS Made in China